



### **Lead-Based Paint Evaluation Report Inspection**

#### **Performed At:**

879 Salem Dr Unit:Primary Primary Toms River Township, NJ 08753

#### **Performed For:**

Margaret Rand 157 Charlotteville Dr. Toms River, NJ 08731

#### **Prepared By:**

LEW Environmental Services, LLC. 181 US Hwy 46 Mine Hill, NJ 07803 Phone (908) 654-8068 Fax (908) 654-8069

Inspection Date: 07/15/24 Order Number: 63608

## **Table Of Contents**

Contact Information	3
Executive Summary	4
Components with Lead Based Paint	4
Regulatory Requirements	5
Required Disclosure	5
Required Training for Workers	5
Controlling Lead-Based Paint	5
Abatement for Lead-Based Paint Free Certification	6
Component Removal	6
Paint Stripping	6
Procedures & Methodology	6
Location Conventions	6
Paint Testing	6
X-Ray Fluorescence	6
Calibration Check Readings	7

# **Appendices**

Appendix A - Floor Plan

Appendix B - Lead-Based Paint Evaluation Report

# **Contact Information**

### Site

Street Address	879 Salem Dr Unit Primary Toms River Township, NJ 08753
----------------	--

## **Property Owner**


Name	Margaret Rand
Street Address	157 Charlotteville Dr. Toms River, NJ 08731
Phone Number	7327793156

### **Lead-Based Paint Risk Assesor**

Name	Alex Salvador
Certification Number	022779
Instrumentation	Viken Pb200i/e
Signature	00020e
Date	07/30/2024

### Firm

Organization:	LEW Environmental Services, LLC.
Certification #:	NJDCA 00015
Sreet:	181 US Hwy 46
City, State & Zip:	Mine Hill, NJ 07803
Phone Number:	908-654-8068
Web Address:	lewenvironmental.com





### **Executive Summary**

For 879 Salem Dr Unit Primary Toms River Township, NJ 08753 07/30/2024

On 07/15/24, Alex Salvador of LEW Environmental Services, LLC (NJDCA 00015 E) performed a lead-based paint inspection at 879 Salem Dr Unit Primary . The lead-based paint inspection sampling protocol that was applied follows "Inspections in Single-Family Housing" Chapter 7 of the HUD Guidelines (2012 revision) and the protocol as referenced in USEPA 40 CFR Part 745.227(b). See Appendix B Lead Paint Inspection Report for the complete set of X-Ray Fluorescence data.

The tables below indicate the location of the lead-based paint found. Each positive reading applies to all similar components in the same room equivalent (room, hall, stairwell, building exterior, etc.) For a lead-based paint free certification, the lead must be stripped or the leaded component replaced and confirmation achieved. Enclosure and encapsulation are not acceptable methods for a lead-based paint free certification. If no lead-based paint was identified, the table will list "None" and the dwelling unit is considered lead-based paint free.

### **Components With Lead Based Paint**

Room Equivalent	Component	Substrate	Value( mg/cm <sup>2</sup> )						
	None								

EPA 40 CFR 745.227(h) states lead-based paint is present on any surface that is tested and found to contain lead equal to or in excess of 1.0 milligrams per square centimeter or equal to or in excess of 0.5% by weight. Local thresholds may be lower than this Federal standard.

#### **Regulatory Requirements**

#### **Required Disclosure**

A summary of this lead-based paint evaluation report must be provided to new lessees (tenants). A complete copy of this report must be provided to purchasers and owners of this property and it must be made available to new tenants under federal law (24 CFR PART 35 AND 40 CFR PART 745) before they become obligated under a lease or sales contract. Landlords (lessors) and sellers are also required to distribute an educational pamphlet approved by the U.S. Environmental Protection Agency and include standard warning language in their leases or sales contracts to ensure that parents have the information they need to protect their children from lead-based paint hazards."

Should the recipient of this report receive federal subsidy they are responsible to comply with all requirements of 24 CFR Part 35 Requirements for the Notification, Evaluation and Reduction of Lead-Based Paint Hazards in Federally Owned Residential Property and Housing Receiving Federal Assistance; Final Rule which, are applicable to the type of program they are participating in and the dollar amount of subsidy being received. If this property or any of its tenants receives financial federal assistance, the results of the evaluation or hazard reduction activities must be provided by the designated party (client) to the owner of the referenced property and the occupants within 15 calendar days of the date when the designated party receives this report, or makes the presumption that lead-based paint hazards do exist.

#### **Required Training for Workers**

Should the lead-based paint and lead hazard reduction activities be part of a program which receives federal subsidy or a New Jersey multifamily building, all persons performing "Interim Controls" or "Standard Treatments" must be trained in accordance with 29 CFR 1926.59 and be supervised by an individual who successfully completed one of the following courses:

- 1. A lead-based paint abatement supervisors course accredited in accordance with 40 CFR 745.225
- 2. A lead-based paint abatement worker course accredited in accordance with 40 CFR 745.225
- The lead-based paint Maintenance Training Program, "Work Smart, Work Wet, and Work Clean to Work Lead Safe", prepared by the National Environmental Training Association for EPA and HUD
- 4. "The Remodeler's and Renovator's Lead-Based Paint Training Program," prepared by HUD and the National Association of the Remodeling Industry
- 5. Another course approved by HUD for this purpose after consultation with EPA.

In accordance with Section 35.1340 all Lead-Based Paint and Lead Hazard reduction activities, which are not exempt (see regulations) require Lead Dust Wipe Clearance testing by a 1) certified lead inspector, 2) certified risk assessor or 3) a dust wipe sampling technician whose work is reviewed by a certified risk assessor.

If a renovation at the property is to occur, all work should comply with 40 CFR 745 Subpart E-Residential Property Renovation.

#### **Controlling Lead-Based Paint**

There are different options available for controlling lead-based paint. Each option has its own associated costs and benefits both short and long term. In most cases, a combination of the options can be implemented to reduce the possibility of lead contamination. LEW Environmental Services,

LLC. strongly suggests that each option is thoroughly contemplated before beginning any activity.

Components that are found to be positive for lead-based paint should be checked for deterioration. Lead-based paint in deteriorated condition is considered a paint-lead hazard. Those components should be address as soon as possible using lead safe work practices at a minimum. However, if any components are found to test positive for lead based paint, they should be considered for future component removal or paint stripping.

#### Abatement for Lead-Based Paint Free Certification

#### **Component Removal**

Component removal is a permanent solution to the issue of potential exposure of lead. It requires taking the old lead-based painted component out and replacing it with a new non-lead painted component. The cost associated with this option depends mostly on the cost of the replacement component. Since labor is most often the more costly aspect of controlling lead issues, many owners choose component removal over more labor intensive methods. Components often chosen for removal are wood trim, windows, most doors, and exterior railings. Plaster and drywall ceilings and walls, fire rated doors, and wood porch components should also be considered.

#### **Paint Stripping**

Paint stripping is a permanent solution to the issue of potential exposure of lead. The paint can be removed either in-place or by an off-site processing facility. In-place removal can be mechanical or chemical. In-place paint stripping has the issue of proper disposal of the hazardous waste generated.

Mechanical stripping scrapes the paint off the substrate. Most times dry scraping is prohibited, but sanding or scraping can be done in conjunction with engineering controls to reduce airborne and settled lead dust. Power tools used to remove the paint must be equipped with a HEPA filtered shroud. Wetting a surface and hand scraping is also permitted. The components most often chosen for hand scraping are window and door jambs. Power tools are better equipped to handle lager surface areas.

Chemical stripping in-place uses strong chemicals to soften the paint for easier removal from the substrate. The chemicals are either very acidic or very basic, so proper training and protection for the worker is imperative. Generally, the chemicals must remain in-place overnight, so maintaining a secure worksite separate from occupants is mandatory.

Off site facilities use much stronger chemicals to remove the lead-based paint from the component. Components often chosen for off-site paint removal are intricate metal pieces. Sometimes this method is used for intricate wood work, but the stronger chemicals soften the wood and can drive lead into the wood while removing the paint.

#### **Procedures & Methodology**

#### **Location Conventions**

When reviewing Appendix A "Floor Plan" and Appendix B "Lead-Based Paint Evaluation Report", you will notice that the letters A, B, C, and D or the numbers 1, 2, 3 and 4 are used to identify the location of specific components. The key to correct orientation is the location of the "A" or "1" wall. The "B" or "2" wall, "C" or "3" wall, and "D" or "4" wall run clockwise from the "A" or "1" wall. The Lead-Based Paint Evaluation Report lists this information under the "Wall" column. The "Location"

column uses numbering of replicated components starting with "1" at left and continuing sequentially to right respectively to describe the location of the component while facing the wall identified.

#### **Paint Testing**

#### X-Ray Fluorescence

X-Ray Fluorescence (XRF) paint testing is performed to detect the presence of lead on painted surfaces. The XRF instrument is state-of-the art equipment. XRF testing is usually the preferred method of testing, because it is non-destructive, quantitative and can be performed on the spot with acceptable accuracy. LEW Environmental Services, LLC. 's evaluators follow the manufacturer's suggested use and the Performance Characteristic Sheet of the XRF instrument being used. The results of the XRF testing are the basis for drawing conclusions and making recommendations in the report.

All LEW Environmental Services, LLC. 's evaluators follow 40 CFR 745 and the HUD Guidelines for testing lead using an XRF instrument. All federal, state and city regulations are followed when applicable. The evaluator will test one of each and every different type of testing combination (component) in each room being surveyed. Each XRF reading is assigned an exclusive sample reference number and a measurement that is stored in the instrument. Each sample reference number location is logged on the XRF instrument for future reference, testing location, and report generation. The above described testing format is followed unless otherwise not practical or if the evaluator's judgment decides to test in a different systematic approach.

It should be noted that detected lead levels below current levels still could create lead dust or lead-contaminated soil hazards if the paint is turned into dust by abrasion, scraping, or sanding leading to possible elevated blood lead levels. Lead poisoning is a cumulative affect. Should a child or an adult inhale or ingest sufficient quantities of low concentrations of leaded paint, dust, or soil, it will accumulate in the body's systems and could eventually cumulate to an elevated blood level of concern.

#### Any untested building components should be considered lead-based paint until tested.

#### **Calibration Check Readings**

In addition to the manufacturer's recommended warm up and quality control procedures, LEW Environmental Services, LLC. collects quality control readings as recommended in the HUD Guidelines. Quality control for XRF instrumentation instruments involves readings to check calibration.

For each XRF instrument, one set of XRF calibration check readings are recommended at least every four hours. The first is a set of three nominal-time or source decay corrected time XRF calibration check readings to be taken before the inspection begins for the day. The second occurs either after the day's inspection work has been completed, or at least every four hours, whichever occurs first. LEW Environmental Services, LLC. 's XRF calibration check readings are taken on the Standard Reference Material (SRM) paint film nearest to 1.0 mg/cm² within the National Institute of Standards and Technology (NIST) SRM Used or the XRF manufacturer's factory supplied SRM film. Three readings are collected on the SRM. The average of the three readings on the SRM must be within the acceptable plus and minus tolerances for proper calibration as detailed in the Performance Characteristic Sheet (PCS). All calibration checks are taken with the SRM film positioned at least several inches away from any potential source of lead.

Three readings are taken each time calibration check readings are made. The average of the readings are compared to the known value and if the average value is within the acceptable calibration check tolerance specified in the XRF Performance Characteristic Sheet the instrument is considered in control. If the average readings are not within the calibration check tolerance the instrument is not used until the instrument is brought back into control.

Company LEW Corporation
XRF Make Heuresis
Model Pb200i
Serial Num. 2822
Lead concentration units: mg/cm2
Total Readings: 161
Action Level 1
Mode Action Level

Paint

Analytic Mode

#### **All Readings**

Job Id	Rea	ading #	Concentration	Result	Calibration	RTA Present	Date	Time	User	Analytic Mode	Site Address	Area	Unit#	Room	Structure	Member	Substrate	Wall	Location
7	7151003	257	1		TRUE	FALSE	7/15/2024	10:03 AM	Alex Salvador	Paint	879 Salem Dr Toms River								
7	7151003	258	1		TRUE	FALSE	7/15/2024	10:03 AM	Alex Salvador	Paint	879 Salem Dr Toms River								
7	7151003	259	1		TRUE	FALSE	7/15/2024	10:03 AM	Alex Salvador	Paint	879 Salem Dr Toms River								
7	7151003	260	0.1		TRUE	FALSE	7/15/2024	10:03 AM	Alex Salvador	Paint	879 Salem Dr Toms River								
7	7151003	261	0.1		TRUE	FALSE	7/15/2024	10:04 AM	Alex Salvador	Paint	879 Salem Dr Toms River								
7	7151003	262	0		TRUE	FALSE	7/15/2024	10:04 AM	Alex Salvador	Paint	879 Salem Dr Toms River								
7	7151003	263	0.1	Negative	FALSE	FALSE	7/15/2024	10:06 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Living Room	Door		Metal	Α	1
7	7151003	264	0	Negative	FALSE	FALSE	7/15/2024	10:07 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Living Room	Door	Jamb	Wood	Α	1
7	7151003	265	0.1	Negative	FALSE	FALSE	7/15/2024	10:07 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Living Room	Door	Casing	Wood	Α	1
7	7151003	266	-0.2	Negative	FALSE	FALSE	7/15/2024	10:07 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Living Room	Window	Sill	Wood	Α	1
7	7151003	267	0	Negative	FALSE	FALSE	7/15/2024	10:08 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Living Room	Window	Apron	Wood	Α	1
7	7151003	268	0.1	Negative	FALSE	FALSE	7/15/2024	10:08 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Living Room	Room	Wall	Drywall	Α	1
7	7151003	269	0.3	Negative	FALSE	FALSE	7/15/2024	10:08 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Living Room	Room	Wall	Drywall	В	1
7	7151003	270	0.1	Negative	FALSE	FALSE	7/15/2024	10:08 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Living Room	Room	Wall	Drywall	С	1
7	7151003	271	0	Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Living Room	Room	Wall	Drywall	D	1
	7151003	272	-0.4	Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Living Room	Room	Baseboard	Wood	D	1
7	7151003	273	0	Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Living Room	Closet	Door	Wood	Α	1
	7151003	274		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Living Room	Closet	Door Jamb	Wood	Α	1
	7151003	275		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Living Room	Closet	Shelf Support	Wood	Α	1
	7151003	276	0.1	Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Living Room	Closet	Wall	Drywall	Α	1
	7151003	277		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Living Room	Closet	Baseboard	Wood	Α	1
	7151003	278		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Bedroom 1	Door		Wood	С	1
	7151003	279		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Bedroom 1	Door	Jamb	Wood	С	1
	7151003	280		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Bedroom 1	Door	Casing	Wood	С	1
	7151003	281		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Bedroom 1	Closet	Door	Wood	С	1
	7151003	282		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Bedroom 1	Closet	Door Jamb	Wood	С	1
	7151003	283		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Bedroom 1		Door Casing	Wood	С	1
	7151003	284		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Bedroom 1	Closet	Shelf Support	Wood	С	1
	7151003	285		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Bedroom 1	Closet	Shelf	Wood	С	1
	7151003	286		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	ļ	Bedroom 1	Closet	Wall	Drywall	С	1
	7151003	287		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Bedroom 1	Window	Sill	Wood	В	1
	7151003	288		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Bedroom 1	Room	Wall	Drywall	R	1
_	7151003	289		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Bedroom 1	Room	Wall	Drywall	C	<del></del>
	7151003	290		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Bedroom 1	Room	Wall	Drywall	טו	<u> </u>
	7151003	291		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	1	Bedroom 1	Room	Wall	Drywall	A	<del>                                     </del>
	7151003	292		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	-	Bedroom 1	Room	Baseboard	Wood	ח	<u> </u>
	7151003	293		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	-	Bedroom 2	Room	Baseboard	Wood	ח	<u></u>
	7151003	294		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	<del>                                     </del>	Bedroom 2		Wall	Drywall	D	<u> </u>
	7151003	295		Negative	FALSE FALSE	FALSE FALSE	7/15/2024 7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	<del>                                     </del>	Bedroom 2	Room	Wall	Drywall	A	<u> </u>
	7151003	296		Negative	FALSE	FALSE	<u> </u>	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Bedroom 2	Room	Wall	Drywall	C B	<u> </u>
	7151003 7151003	297 298		Negative	FALSE	FALSE	7/15/2024 7/15/2024	1	Alex Salvador Alex Salvador	Paint Paint	879 Salem Dr Toms River	Unit Unit	1	Bedroom 2	Room Window	Sill	Drywall Wood	B	1
	7151003	298		Negative Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River 879 Salem Dr Toms River	Unit		Bedroom 2 Bedroom 2	Window	Apron	Wood	B	
	7151003	300		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Bedroom 2	Door		Wood	D	1
	7151003	301		Negative	FALSE	FALSE			Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Bedroom 2	1	Jamb	Wood	D	1
<u> </u>	131003	301	-0.2	ivegative	IALJE	TALSE	1/13/2024	10.17 AIVI	AICA Jaivauul	i ailit	107.5 Saletti Di Tottis Kivel	Joint		DCG100111 Z	10001	Janib	vvoou	12	

Job Id	Reading #	Concentration	Result	Calibration	RTA Present	Date	Time	User	Analytic Mode	Site Address	Area Unit#	Room	Structure	Member	Substrate	Wall	Location
7151003	302		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bedroom 2	Door	Casing	Wood	D	1
7151003	303		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bedroom 2	Closet	Door	Wood	A	1
7151003	304		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bedroom 2	Closet	Door Jamb	Wood	Α	1
7151003	305		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bedroom 2	Closet	Door Casing	Wood	Α	1
7151003	306		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bedroom 2	Closet	Shelf Support	Wood	Α	1
7151003	307		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bedroom 2	Closet	Shelf	Wood	Α	1
7151003	308		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Door		Wood	Α	1
7151003	309		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bathroom	Door	Jamb	Wood	Α	1
7151003	310		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bathroom	Door	Casing	Wood	Α	1
7151003	311		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bathroom	Cabinets	Door	Wood	D	1
7151003	312		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bathroom	Cabinets	Frame	Wood	D	1
7151003	313		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bathroom	Room	Wall	Drywall	D	1
7151003	314		Negative	FALSE	FALSE	7/15/2024	10:21 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bathroom	Room	Wall	Drywall	Α	1
7151003	315		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bathroom	Room	Wall	Drywall	В	1
7151003	316		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bathroom	Room	Wall	Drywall	С	1
7151003	317		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bathroom	Room	Ceiling	Drywall	С	1
7151003	318		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bathroom	Window	Jamb	Wood	C	1
7151003	319		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bathroom	Room	Baseboard	Wood	В	1
7151003	320		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bathroom	Register		Metal	В	1
7151003	321		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Hall	Closet	Door	Wood	D	1
7151003	322		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Hall	Closet	Door Jamb	Wood	D	1
7151003	323		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Hall	Closet	Door Casing	Wood	D	1
7151003	324		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Hall	Closet	Shelf Support	Wood	D	1
7151003	325		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Hall	Closet	Shelf	Wood	D	1
7151003	326		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Hall	Closet	Wall	Drywall	D	1
7151003	327		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Hall	Room	Wall	Drywall	D	1
7151003	328		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Hall	Room	Wall	Drywall	С	1
7151003	329		Negative	FALSE	FALSE	7/15/2024	10:25 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Hall	Room	Wall	Drywall	В	1
7151003	330		Negative	FALSE	FALSE	7/15/2024	10:25 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Hall	Room	Wall	Drywall	Α	1
7151003	331		Negative	FALSE	FALSE	7/15/2024	10:25 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Hall	Room	Baseboard	Wood	С	1
7151003	332		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Rear Entry	Room	Baseboard	Wood	D	1
7151003	333	0.2	Negative	FALSE	FALSE	7/15/2024	10:26 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Rear Entry	Room	Wall	Drywall	D	1
7151003	334	0.1	Negative	FALSE	FALSE	7/15/2024	10:26 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Rear Entry	Room	Wall	Drywall	С	1
7151003	335	0.1	Negative	FALSE	FALSE	7/15/2024	10:27 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Rear Entry	Room	Wall	Drywall	В	1
7151003	336	0.1	Negative	FALSE	FALSE	7/15/2024	10:27 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Rear Entry	Room	Wall	Drywall	Α	1
7151003	337	0.2	Negative	FALSE	FALSE	7/15/2024	10:27 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Rear Entry	Room	Ceiling	Drywall	Α	1
7151003	338	0.1	Negative	FALSE	FALSE	7/15/2024	10:27 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Rear Entry	Door		Metal	С	1
7151003	339		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Rear Entry	Door	Jamb	Wood	С	1
7151003	340	0.1	Negative	FALSE	FALSE	7/15/2024	10:28 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Rear Entry	Door	Casing	Wood	С	1
7151003	341	-0.2	Negative	FALSE	FALSE	7/15/2024	10:28 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Kitchen	Window	Sill	Wood	С	1
7151003	342		Negative	FALSE	FALSE	7/15/2024	10:29 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Kitchen	Window	Jamb	Wood	С	1
7151003	343	-0.1	Negative	FALSE	FALSE	7/15/2024	10:29 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Kitchen	Window	Casing	Wood	С	1
7151003	344	0	Negative	FALSE	FALSE	7/15/2024	10:29 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Kitchen	Cabinets	Door	Wood	С	1
7151003	345	0.1	Negative	FALSE	FALSE	7/15/2024	10:29 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Kitchen	Cabinets	Frame	Wood	С	1
7151003	346	0.2	Negative	FALSE	FALSE	7/15/2024	10:30 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Kitchen	Room	Wall	Drywall	С	1
7151003	347	0.1	Negative	FALSE	FALSE	7/15/2024	10:30 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Kitchen	Room	Wall	Drywall	В	1
7151003	348	0	Negative	FALSE	FALSE	7/15/2024	10:30 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Kitchen	Room	Baseboard	Wood	В	1
7151003	349	0.2	Negative	FALSE	FALSE	7/15/2024	10:30 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Kitchen	Room	Wall	Drywall	Α	1
7151003	350	0.1	Negative	FALSE	FALSE	7/15/2024	10:31 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Kitchen	Room	Wall	Drywall	D	1
7151003	351	0	Negative	FALSE	FALSE	7/15/2024	10:31 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Dining Room	Room	Wall	Drywall	В	1
7151003	352	0	Negative	FALSE	FALSE	7/15/2024	10:31 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Dining Room	Room	Wall	Drywall	С	1
7151003	353	-0.1	Negative	FALSE	FALSE	7/15/2024	10:31 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Dining Room	Room	Wall	Drywall	D	1
7151003	354	0	Negative	FALSE	FALSE	7/15/2024	10:32 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Dining Room	Room	Wall	Drywall	Α	1
7151003	355	-0.2	Negative	FALSE	FALSE	7/15/2024	10:32 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Dining Room	Room	Baseboard	Wood	Α	1
7151003	356	-0.2	Negative	FALSE	FALSE	7/15/2024	10:32 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Dining Room	Window	Jamb	Wood	Α	1

Job Id	Reading #	Concentration	Result	Calibration	RTA Present	Date	Time	User	Analytic Mode	Site Address	Area Unit#	Room	Structure	Member	Substrate	Wall	Location
7151003	357		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit Unit	Dining Room	Window	Casing	Wood	Δ	1
7151003	358		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Dining Room	Room	Wall	Drywall	В	1
7151003	359		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Dining Room	Room	Baseboard	Wood	D	1
7151003	360		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Dining Room	Door		Wood	D	1
7151003	361		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Dining Room	Door	Jamb	Wood	D	1
7151003	362		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Dining Room	Door	Casing	Wood	D	1
7151003	363		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Living Room	Room	Ceiling	Drywall	D	1
7151003	364		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Hall	Room	Ceiling	Drywall	D	1
7151003	365		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bedroom 1	Room	Ceiling	Drywall	D	1
7151003	366		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bedroom 2	Room	Ceiling	Drywall	D	1
7151003	367		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bathroom	Room	Ceiling	Drywall	D	1
7151003	368		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Kitchen	Room	Ceiling	Drywall	D	1
7151003	369		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Dining Room	Room	Ceiling	Drywall	D	1
7151003	370		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bathroom 2	Room	Ceiling	Drywall	D	1
7151003	371		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bathroom 2	Room	Wall	Drywall	В	1
7151003	372		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bathroom 2	Room	Wall	Drywall	C	1
7151003	373		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bathroom 2	Room	Wall	Drywall	D	1
7151003	374		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bathroom 2	Room	Wall	Drywall	Δ	1
7151003	375		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bathroom 2	Door		Wood	Ā	1
7151003	376		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bathroom 2	Door	Jamb	Wood	A	1
7151003	377		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bathroom 2	Door	Casing	Wood	A	1
7151003	378		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bathroom 2	Room	Baseboard	Wood	В	1
7151003	379		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bathroom 2	Cabinets	Door	Wood	D	1
7151003	380		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bathroom 2	Cabinets	Frame	Wood	D	1
7151003	381		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	2nd Floor Hallway	Room	Wall	Drywall	D	1
7151003	382		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	2nd Floor Hallway	Room	Wall	Drywall	A	1
7151003	383		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	2nd Floor Hallway	Room	Wall	Drywall	В	1
7151003	384		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	2nd Floor Hallway	Room	Wall	Drywall	C	1
7151003	385		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	2nd Floor Hallway	Room	Baseboard	Wood	C	1
7151003	386		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bedroom 4	Door		Wood	C	1
7151003	387		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bedroom 4	Door	Jamb	Wood	C	1
7151003	388		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bedroom 4	Door	Casing	Wood	C	1
7151003	389		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bedroom 4	Room	Wall	Drywall	C	1
7151003	390		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bedroom 4	Room	Baseboard	Wood	C	1
7151003	391		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bedroom 4	Room	Wall	Drywall	В	1
7151003	392		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bedroom 4	Room	Wall	Drywall	D	1
7151003	393		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bedroom 4	Window	Jamb	Wood	D	1
7151003	394		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bedroom 4	Window	Casing	Wood	D	1
7151003	395		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bedroom 4	Closet	Shelf Support	Wood	A	1
7151003	396		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bedroom 4	Closet	Shelf	Wood	Α	1
7151003	397		Negative	FALSE	FALSE	7/15/2024		Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bedroom 4	Closet	Wall	Wood	Α	1
7151003	398		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bedroom 4	Room	Wall	Drywall	Α	1
7151003	399		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bedroom 4	Room	Wall	Drywall	В	1
7151003	400		Negative	FALSE	FALSE	7/15/2024	1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bedroom 4	Room	Ceiling	Drywall	В	1
7151003	401		Negative	FALSE	FALSE	+ ' '	1	Alex Salvador		879 Salem Dr Toms River	Unit		Room	Ceiling	Drywall	В	1
7151003	402		Negative	FALSE	FALSE			Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bedroom 3	Door		Wood	D	1
7151003	403		Negative	FALSE	FALSE			Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bedroom 3	Door	Jamb	Wood	D	1
7151003	404		Negative	FALSE	FALSE				Paint	879 Salem Dr Toms River	Unit	Bedroom 3	Door	Casing	Wood	D	1
7151003	405		Negative	FALSE	FALSE			Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bedroom 3	Room	Wall	Drywall	D	1
7151003	406		Negative	FALSE	FALSE			Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bedroom 3	Room	Wall	Drywall	A	1
7151003	407		Negative	FALSE	FALSE		1		Paint	879 Salem Dr Toms River	Unit	Bedroom 3	Room	Wall	Drywall	С	1
7151003	408		Negative	FALSE	FALSE			Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bedroom 3	Room	Wall	Drywall	В	1
7151003	409		Negative	FALSE	FALSE				Paint	879 Salem Dr Toms River	Unit	Bedroom 3	Window	Jamb	Wood	В	1
7151003	410		Negative	FALSE	FALSE		1	Alex Salvador	Paint	879 Salem Dr Toms River	Unit	Bedroom 3	Window	Casing	Wood	В	1
7151003	411		Negative	FALSE	FALSE		1	Alex Salvador		879 Salem Dr Toms River	Unit	Bedroom 3	Closet	Door	Wood	Α	1
, 101000	/11	5.1	6 - 1 - 1			., _5, _5_+											

Job Id	Reading #	Concentration	Result	Calibration	RTA Present	Date	Time	User	Analytic Mode	Site Address	Area	Unit#	Room	Structure	Member	Substrate	Wall	Location
7151003	412	-0.2	Negative	FALSE	FALSE	7/15/2024	10:49 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Bedroom 3	Closet	Shelf Support	Wood	Α	1
7151003	413	-0.1	Negative	FALSE	FALSE	7/15/2024	10:50 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Bedroom 3	Closet	Shelf	Wood	Α	1
7151003	414	0.1	Negative	FALSE	FALSE	7/15/2024	10:50 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Bedroom 3	Closet	Wall	Drywall	Α	1
7151003	415	0.1	Negative	FALSE	FALSE	7/15/2024	10:50 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Bedroom 3	Room	Ceiling	Drywall	Α	1
7151003	416	-0.2	Negative	FALSE	FALSE	7/15/2024	10:50 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Bedroom 3	Room	Baseboard	Wood	D	1
7151003	417	-0.1	Negative	FALSE	FALSE	7/15/2024	10:51 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Bedroom 3	Door		Wood	D	1
7151003	418	-0.3	Negative	FALSE	FALSE	7/15/2024	10:51 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Bedroom 3	Door	Jamb	Wood	D	1
7151003	419	-0.2	Negative	FALSE	FALSE	7/15/2024	10:51 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Bedroom 3	Door	Casing	Wood	D	1
7151003	420	-0.1	Negative	FALSE	FALSE	7/15/2024	10:51 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Living Room	Stair	Railing	Wood	В	1
7151003	421	-0.1	Negative	FALSE	FALSE	7/15/2024	10:52 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Living Room	Stair	Balusters	Wood	В	1
7151003	422	-0.2	Negative	FALSE	FALSE	7/15/2024	10:52 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Living Room	Stair	Stringer	Wood	В	1
7151003	423	0.1	Negative	FALSE	FALSE	7/15/2024	10:52 AM	Alex Salvador	Paint	879 Salem Dr Toms River	Unit		Living Room	Stair	Newel Post	Wood	В	1
7151003	424	1		TRUE	FALSE	7/15/2024	10:53 AM	Alex Salvador	Paint	879 Salem Dr Toms River								
7151003	425	1		TRUE	FALSE	7/15/2024	10:54 AM	Alex Salvador	Paint	879 Salem Dr Toms River								
7151003	426	1		TRUE	FALSE	7/15/2024	10:54 AM	Alex Salvador	Paint	879 Salem Dr Toms River								
7151003	427	0		TRUE	FALSE	7/15/2024	10:54 AM	Alex Salvador	Paint	879 Salem Dr Toms River								
7151003	428	0		TRUE	FALSE	7/15/2024	10:54 AM	Alex Salvador	Paint	879 Salem Dr Toms River								
7151003	429	0		TRUE	FALSE	7/15/2024	10:54 AM	Alex Salvador	Paint	879 Salem Dr Toms River								

Company LEW Corporation XRF Make Heuresis Model Pb200i Serial Num. 2822

Lead concentration units: mg/cm2


Total Readings: 161 Total Positives 0

Action Level 1
Mode Action Level
Analytic Mode Paint

Actionables

Job Id	Reading #	Concentration	Result	Calibration	RTA Present	Date	Time	User	Analytic Mode	Site Address	Area	Unit # Room	Structure	Member	Substrate Wall Location
	No Actionables														

# Floor Plan(s)

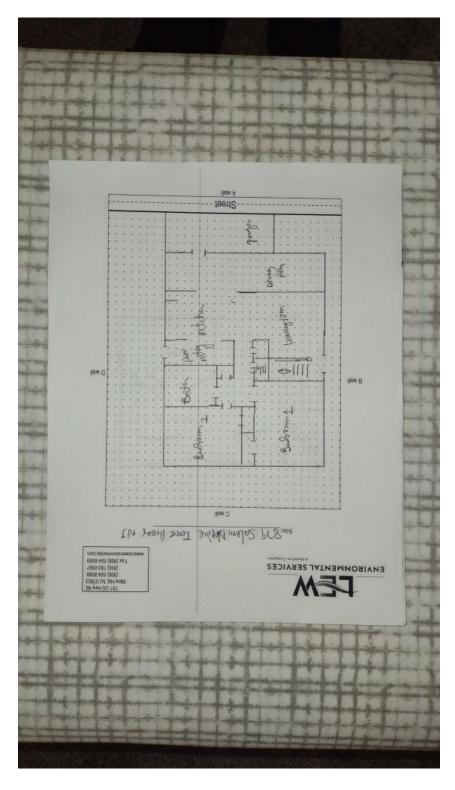

## **Lead - Free Certificate**

## **Lead - Free (Interior Only)**

It is hereby certified that a lead based paint inspection, has been performed, and the results of this inspection indicate that no lead in the amount greater than or equal to 1.0 mg/cm2 or greater than 0.5 % by weight in paint, was found on any building component using the protocols outlined in **N.J.A.C.** 5:17-3.2(c). Therefore, the dwelling(s) identified below qualify for the following exemption.

□ <b>N.J.A.C.</b> 5:10-1.12(h)4 (Additional Lead	Paint Fee)	ВНІ	Registration Nu	umber:	N/A							
□ <b>N.J.A.C. 5:10-6.6</b> (Lead-Safe Maintenan	ce)											
□ N.J.A.C. 5:27-4.10(a)1 OR N.J.A.C. 5:15-4.2(c) (Rooming & Boarding OR Emergency Shelters) Facility ID:												
☑ N.J.A.C. 5:28-2.1(a) State Housing Code												
□ CHILD OCCUPIED FACILITY (Daycare Centers, Preschools, etc.) PURSUANT TO N.J.A.C. 5:17												
Site Address: 879 Salem Dr Unit	Primary	County:	Ocean	Block: 4	444.18 Lot:	21						
Applicable Units or Common Areas:	Unit: Primary	Unit: Primary										
Name of Inspector Risk Assesor:	Alex Salvador		_ NJDOH ID									
Name of Evaluation Contractor:	LEW Environmental Services, LLC		_ NJDCA CE	00015								
Address of Evaluation Contractor:	181 US Hwy 46, Mine Hill, NJ 07803		Phone	<u>(</u>	908)654-8068							
Date(s) of Inspection: $07/15/24$	TO <u>07/15/24</u>	-										
Date Certificate Issue: <u>07/30/24</u>	Signature of Inspector / Ris	k Assesor:		(	0012Qe	_						

THIS CERTIFICATE SHOULD BE KEPT BY THE OWNER AND TRANSFERRED TO ALL FUTURE OWNERS FOR LIFE OF STRUCTURE